NOTE: ALL WORK INDICATED ON DRAWINGS ARE PART OF CONTRACT A-5

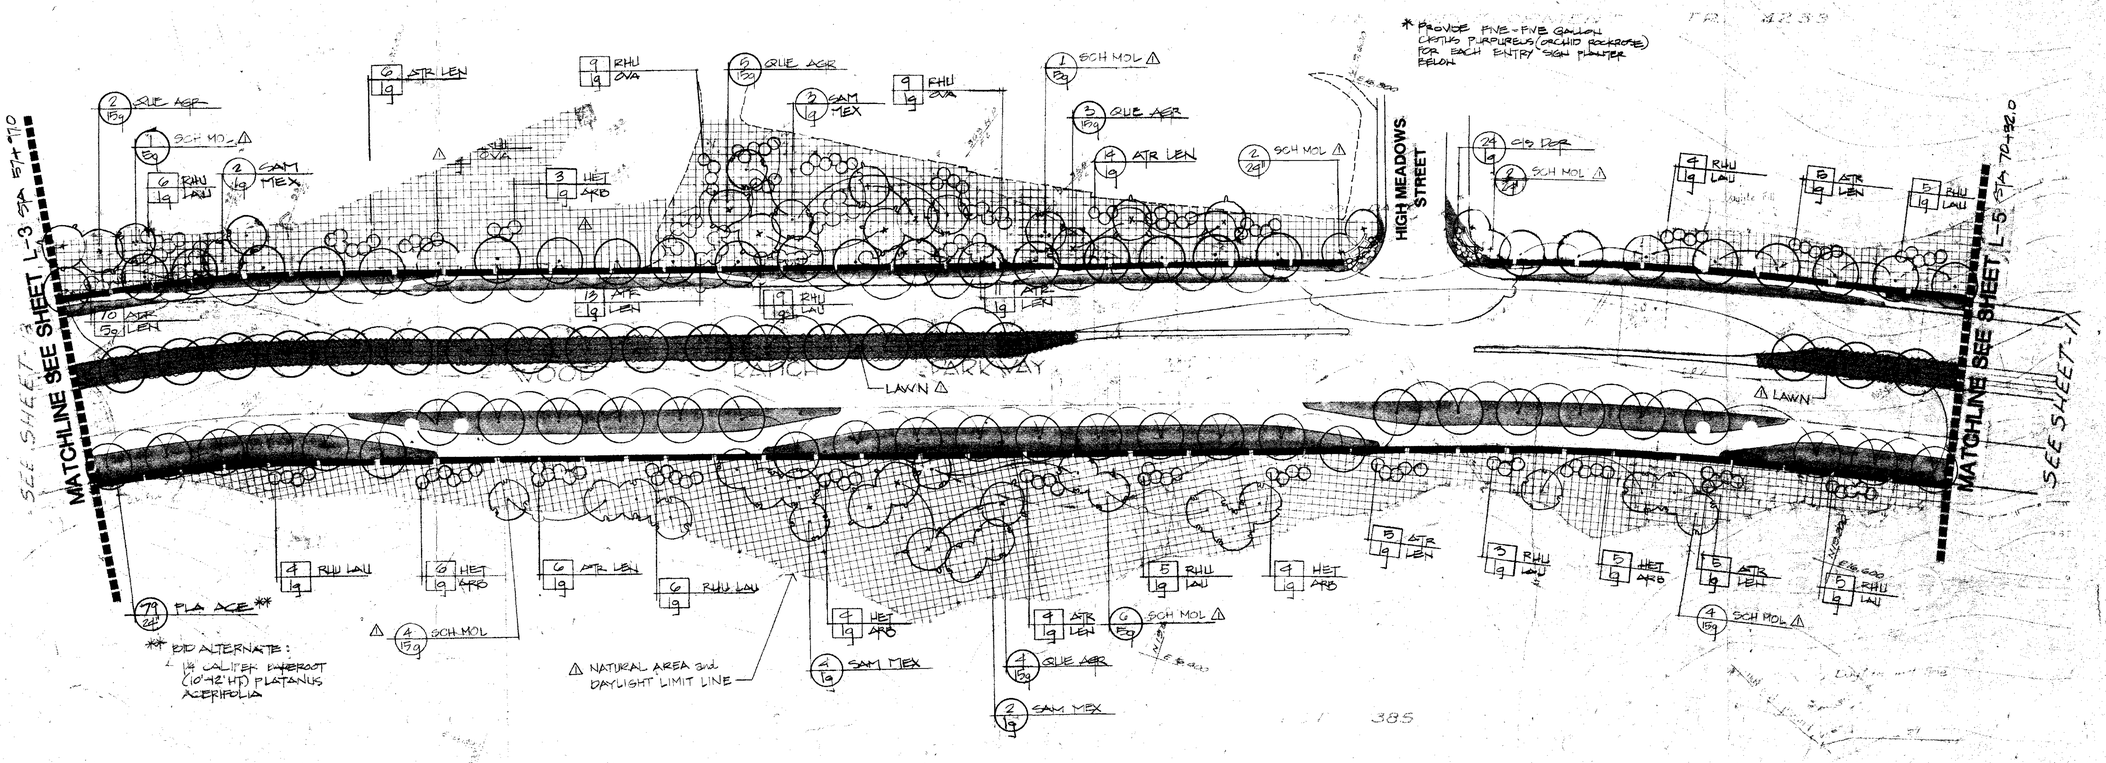


Sycamore Canyon Village RGI-19

| Code: Abbrev. | Botanical Name | Common Name | Size |
|---|---|---|---|
| ACA SAL | Acacia Baileyana | Bailey Acacia | 5 gal. |
| OLE EUR | Olea Europa | Olive Tree | 24" box |
| PLA ACE | Platanus Acerifolia | London Plane Tree | 24" box |
| PLA MXC | Platanus Mexicana | California Sycamore | 48" box |
| QUE AGR | Quercus Agrifolia | Coast Live Oak | 15 gal. |
| SAM MEX | Sambucus Mexicana | Blue Elderberry | 5 gal. |
| SCH MOL | Schinus Molle | California Pepper | 15 gal. |
| [illegible] | [illegible] | [illegible] | [illegible] |
| Shrubs: | | | |
| ACA VER | Acacia Longifolia | Sydney Golden Wattle | 1 gal. |
| ATR LEN | Atriplex Lentiformis | Quail Bush | 1.5 gal. |
| BAC PIL | Baccharis Pilularis | Coyote Bush | 1 gal. |
| CYA RAD | Cearothus Gloriosus | Point Reyes Ceanothus | 5 gal. |
| [illegible] | [illegible] | [illegible] | [illegible] |
| MYO CON | Myoporum Laetum | Myoporum | 1 gal. |
| NEP OVA | Rhus Ovata | Sugar Bush | 1 gal. |
| MYR COM | Myrtus Communis | Myrtle | 1 gal. |
| [illegible] | [illegible] | [illegible] | [illegible] |
| RHU LAU | Rhus Laurina | Rhus Laurina | 1 gal. |
| Groundcover: | | | |
| ACA CHC | Acacia Cheppsig | | 4-inch flats 12" o.c. |
| ATR PEN | Atriplex Semibaccata | Creeping Saltbush | 4-inch flats 12" o.c. |
| BAC PIL | Baccharis Pilularis "DWA Prostrate" | Coyote Brush | 4-inch flats 12" o.c. |
| SAV CON | Santolina Virens | Lavender Cotton | 4-inch flats 12" o.c. |
| Vines: | | | |
| CEP AMP | Ceanothus Arboreus | Evergreen Ceanothus | 5 gal. |

Mix #1 WOODRANCH PARKWAY

| Botanical | lb/ac | purity | germination |
|---|---|---|---|
| Oenothera Lacunae O'Connors Lacunae | 2½ | 98% | 85% |
| Oenanta Spinosus | 5 | 95% | 85% |
| Alyssum 'Carpet of Snow' | 2 | 95% | 80% |
| Eschscholzia 'Dwarf Poppy' | 1 | 95% | 90% |

Mix #2 "DRY" FLAT AREAS - IRRIGATED AREAS

| Botanical | lb/ac | purity | germination |
|---|---|---|---|
| Eschscholzia Californica | 1 | 95% | 75% |
| Plantago erecta | 1/2 | 95% | 90% |
| Oenanta Spinosus | 12 | 70% | 85% |
| Acacia Spolonica | 4 | 95% | 95% |

Mix #3 - UNIRRIGATED AREAS

| | |
|---|---|
| Atriplex Semibaccata | 15 |
| Plantago Insularis | 30 |
| Eschscholzia Californica | 2 |
| Lupinus Nanus | 4 |

Mix #3 MARNA FORRISON POND

| Botanical | lb/ac | purity | germination |
|---|---|---|---|
| Oenothera Cheiranthifolia | 1 | 95% | 75% |
| Glyrrinchium Bellum | 2 | 95% | 75% |
| Plantago Lacelaria | 40 | 95% | 75% |
| O'Connors Lacunae | 10 | 98% | 85% |
| Eschscholzia 'Dwarf Poppy' | 1½ | 95% | 90% |

Falcon Hybrid Fescue — lb/ac 500

Mix available at:
S.S.S.
P.O. Box 4093
San Marcos, Ca. 92069
(619) 756-1347

NOTE: PLANT ALL TREES 7'-0" MIN. AWAY FROM ALL WALKS AND CURBS

DEPARTMENT OF PUBLIC WORKS
MAINTENANCE
DATE 7-7-89 12-13-89
SIGNATURE [illegible]

DEPT. OF ENVIRONMENTAL SERVICES
PLANNING DIVISION
APPROVED
DATE 6/30/89 12/1/89

REGISTERED LANDSCAPE ARCHITECT
ROBERT M. JACKSON
Signature
6-28-89
Date
STATE OF CALIFORNIA

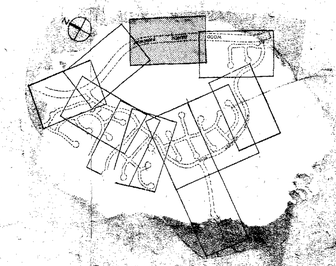

NORTH

SCALE: 1" 40'-0"

CONSULTANTS

| REVISIONS | DATE | BY |
|---|---|---|
| △ MISC. | 11-21-89 | JJH |

240 NEWPORT CENTER DRIVE, SUITE 215
NEWPORT BEACH, CA. 92660
714-851-9444

PROJECT
# SYCAMORE CANYON VILLAGE

PLANTING PLAN

DATE
DRAWN
CHECKED
APPROVED

JOB NO. RGI-19

SHEET L-4
19 OF 20

THE PLANNING CENTER
PLANNING • LANDSCAPE ARCHITECTURE